


388 Series LED

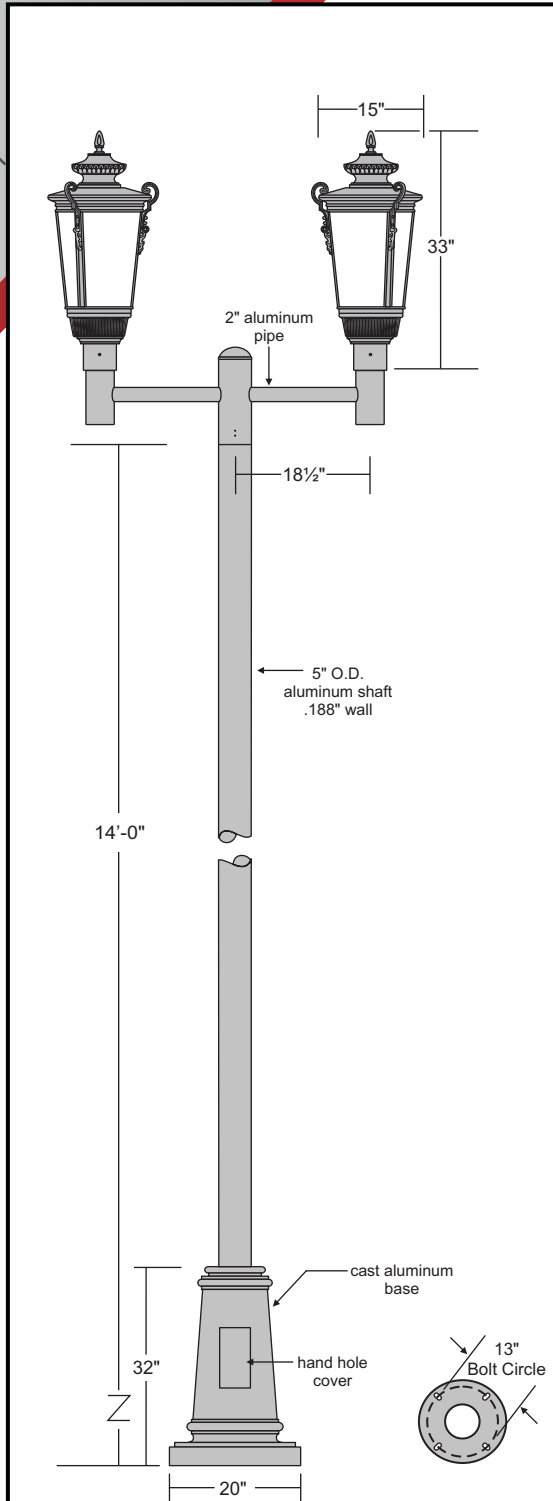

SYSTEM PERFORMANCE SPECIFICATIONS

| | |
|-------------|-------------|
| LED: | 64W |
| Life Hours: | 50,000 |
| CRI: | 70 |
| CCT: | 4000K° |
| Voltage: | 120V - 277V |

FEATURES/BENEFITS

- . High quality LED light that meets industry norms.
- . High efficiency and energy savings.
- . Environmentally friendly.
- . Reliable and low maintenance.
- . 7 year limited warranty on system.
- . All electrical components are UL recognized.

Ordering Example:

(2)WLS-388-64W-LED-SMT-4K-PT-AT02-TWIN ARM/
SRAP5-14'-M11-COLOR

SPECIFICATIONS

LUMINAIRE: Heavy wall, corrosion resistant cast aluminum housing and top.

DIFFUSER: High impact resistant, clear textured acrylic lens.

DRIVER: Electronic LED driver. (120V-277V)

OPTIONAL: *Dimming control (0-10V).*

LIGHT SOURCE: 64W LED.

ARM: All extruded aluminum construction.

POLE: 5" O.D. aluminum shaft, .188" wall thk., circumferentially welded inside and out to a cast aluminum base.

BASE: One piece, corrosion resistant, cast aluminum construction with hand hole cover and ground lug.

ANCHOR BOLTS: (4) 3/4" X 24" hot dipped galvanized steel with double nuts and double washers on a 13" bolt circle.

ELECTRICAL: All components are UL recognized.

Luminaire is shipped complete and ready to install.

Luminaire is designed for operation in wet locations.

FINISH: Powder coat. Standard colors are Black, White, Dark Green, and Dark Bronze. (Custom colors available, consult factory).

(Custom colors available, consult factory).

All exposed hardware shall be stainless steel.



Made in the U.S.A of the U.S. imported parts.
Meets Buy American requirements ARRA

Project name: _____

Date: _____

Location: _____

Notes: _____